



1. 适用范围 / Scope of Application

本产品适用于各类电子设备电路的过流保护作用，广泛应用于照明设备、电源设备、仪器仪表以及适配器等领域。

This product is suitable for various kinds of electronic devices' circuit over current protection. Widely used in industrial of Lighting, Power supply, Instrument, Digital multimeter and Adapter applications, etc.

2. 安规认证标准及编号 / Standards and Agency Approvals

2.1 执行标准：遵循 UL 248 -1 / -14。

Standards: In accordance with UL 248 -1 / -14.

2.2 认证范围 Certification:

额定电压 Voltage Rating	安规标准 Agency	认证范围 Ampere Range	证书编号 Agency File Number
1000VDC	UL	100mA ~ 20A	JDYX2.E340427
	C-UL	100mA ~ 20A	JDYX8.E340427

2.3 目录编号 Catalogue No., A=1000V, ● 已认证 Approved / ○ 认证中 Pending

目录编号 Catalog No.	额定电流 Ampere Rating	额定电压 Voltage Rating	分断能力 Breaking Capacity	安规认证 Agency Approvals	
				UL	cUL
6.000.0100A	100mA	600V/1000V	35A@1000VDC (100mA~1A);	●	●
6.000.0200A	200mA	600V/1000V		●	●
6.000.0250A	250mA	600V/1000V		●	●
6.000.0315A	315mA	600V/1000V		●	●
6.000.0400A	400mA	600V/1000V	100A@1000VDC (1.25A~3.5A);	●	●
6.000.0500A	500mA	600V/1000V		●	●
6.000.0600A	600mA	600V/1000V		●	●
6.000.0800A	800mA	600V/1000V		●	●
6.000.1100A	1A	600V/1000V	200A@1000V DC (4A~10A).	●	●
6.000.1200A	2A	600V/1000V		●	●
6.000.1250A	2.5A	600V/1000V		●	●
6.000.1300A	3A	600V/1000V		●	●
6.000.1400A	4A	600V/1000V	750A@1000V DC (10A~12A).	●	●
6.000.1500A	5A	600V/1000V		●	●



6.000.1600A	6A	600V/1000V		●	●
6.000.1800A	8A	600V/1000V		●	●
6.000.2100A	10A	600V/1000V		●	●
6.000.2120A	12A	600V/1000V		●	●
6.000.2150A	15A	600V/1000V		●	●
6.000.2160A	16A	600V/1000V		●	●
6.000.2200A	20A	600V/1000V		●	●
6.000.2250A	25A	600V/1000V		●	●
6.000.2300A	30A	600V/1000V		●	●

3. 产品标示 / Product Marking

保险丝管体上需有下列标示。

The fuses body shall have the following markings.

示例 Example:

6. 000 Series	0.5A	1000V	c 
①	②	③	④

①	系列型号名称/Series Type Name: 6.000 Series (快断型/Fast-Acting)
②	额定电流/Rated Current (A): <u>0.5</u> A 或 or <u> </u> mA
③	额定电压/Rated Voltage (V): 1000V
④	认证符号/ Approval Marks: c 

注意 / Note: 对于标示的大小和位置没有规定，侵权必究。

Size and position of the markings shall not be provided, all right reserved.

4. 外观及形状 / Appearances and Configuration

4.1 外观不应出现显著的污点、裂纹，标识应该容易辨识。


There shall not be any remarkable stain and crack on the appearances, markings shall be easily legible.

4.2 形状：（带直线引脚）小型陶瓷管保险丝。

Configuration: (Axial Leaded) Miniature Ceramic Tube Fuse.

5. 结构及尺寸 / Dimensions and Structure

单位: 毫米 / Unit: mm

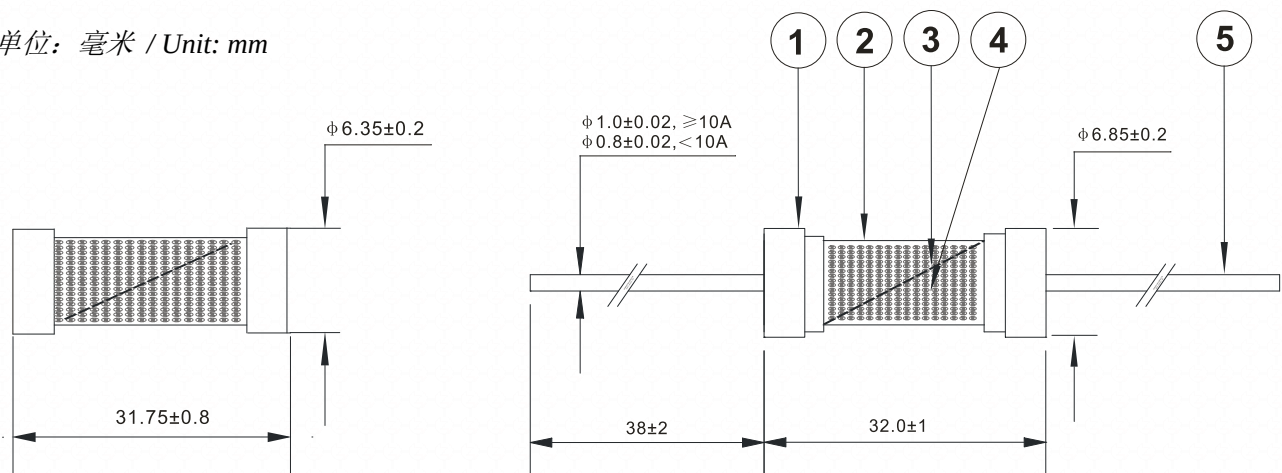

6. 材料明细 / Material Details

编 号 NO.	零 件 名 称 Part Name	材 质 Material
①	铜帽 Cap	黄铜镀镍 Nickel Plated Brass
②	陶瓷管 Body	非透明陶瓷管 Non-Transparent Ceramic Tube
③	熔丝 Fuse element	合金 Alloy
④	灭弧剂 Filler	硅砂 Silica
⑤	引线 Lead wire	镀锡铜线 Tin Plated Copper

7. 产品特性 / Product Characteristics

7.1 引脚拉力强度 / Lead Pull Strength

5 牛顿 10 ± 1 秒 / 5N for 10 ± 1 Seconds

7.2 引脚推力强度 / Lead Thrust Strength

2 牛顿 10 ± 1 秒 / 2N for 10 ± 1 Seconds

7.3 可焊性 / Solder ability

波峰焊/Wave : 260°C , $\leq 3\text{s}$;

烙铁焊/Soldering Iron: $350 \pm 10^{\circ}\text{C}$, $\leq 3\text{s}$.

7.4 耐焊接热 / Soldering Heat Resistance



波峰焊/Wave : 260℃ , 10s;

烙铁焊/Soldering Iron: 350℃ , 5s.

8. 电气特性 / Electrical Characteristics

8.1 实验条件: Test Condition

所有测试环境温度为 25±5℃。

All electrical test is to be conducted with the ambient air at a temperature of 25±5℃.

8.2 负载能力 / Load capacity:

当保险丝通过 100%的额定电流时, 在 4 小时内不应熔断。

When the fuse loads through 100% of rated current, should blow within 4 hours.

8.3 温度上升试验 / Rising Temperature Test:

通 1.0 倍额定电流, 当温度稳定时 (5 分钟测量 4 次, 且每次测量值与平均值相差
不超过 2℃)。测得熔断体任何部位的温升不得超过 75℃, 周围环境温度为 25±5℃。

When the 100% times of Ampere Rating passes the fuse, after reaching thermal balance ,
the temperature on the fuse surface rising shall not be higher than 75℃. Note: Rising
temperature = the Surface temperature - Ambient temperature.

8.4 熔断时限 / Operating Characteristics

额定电流的 % % of Ampere Rating(In)	熔断时间 Blowing Time
100%* In	大于 4 小时(4 hours Min)
200%* In	小于 60 秒(60 sec Max)

9. 环境特性 / Environmental Characteristic

9.1 使用温度范围 / Operating Temperature

-55℃~+125℃。

9.2 保存条件 Stock Condition


湿度: 相对湿度≤75%平均可以存放 3 年。

Humidity: Relative humidity ≤ 75% store 3 years in average.

9.3 若操作环境温度超出 25±5℃ 范围, 在选用保险丝规格时, 需考虑操作环境温度对保险丝的影响, 请参照如下: 温度-电流曲线图。

When choosing the fuse's specification, if the operating environmental temperature beyond the

scope from 20~30°C, engineer should consider the environmental temperature's affection to fuses. Please refer: Temperature Rerating Curve:

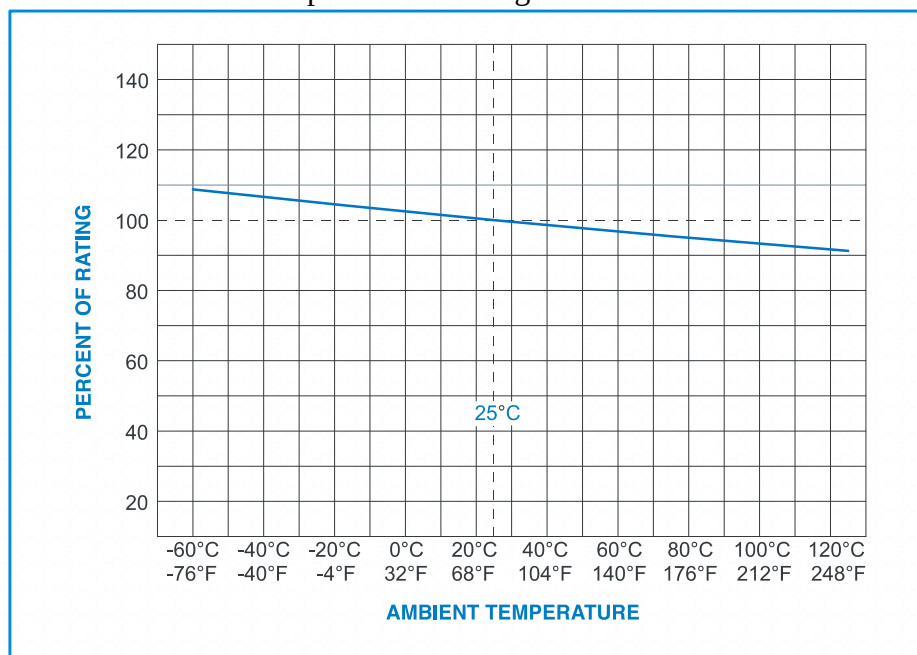

10. 建议焊接参数 / Recommended Soldering Parameters

A. 波峰焊参数 / Wave Parameters:

锡炉温度 / Solder Pot Temperature: 260°C Max

焊接时间 / Solder Dwell Time: 2~5s

B. 手工焊参数 / Hand-Solder Parameters:

烙铁温度 / Solder Iron Temperature: 350 ± 5°C

焊接时间 / Heating Time: 5s Max

10. 包装 / Packaging

11.1 包装袋/盒印明下列标示: / The following items indicated on the label:

产品料号、额定(电压、电流)、分断类型及安规名称。

Catalog number, ratings (voltage, current), interrupting type and safety mark.

包装材料均符合 RoHS/REACH/HF 的环保要求，且包装材料不会和零件发生化学反应，造成不良。

The packing material conforms to ROHS/REACH/HF environmental protection request. And the packing materials will not have the chemical reaction with the components.

11.2 包装数量 / Packing Quantity



每胶袋 200 个保险丝 / Bulk 200 pcs in per poly bag;

每 10 胶袋 1 个内盒 / 10 poly bags in per inner box;

每 4 个内盒 1 个外箱 / 4 inner boxes in per outer carton

11.3 包装箱尺寸 / Packing Size

单位: 毫米 / Unit: mm

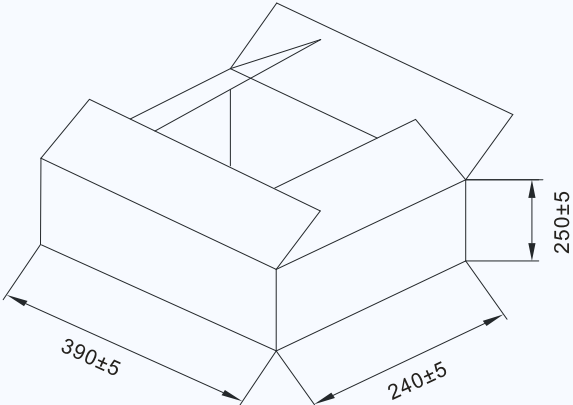A. 内盒 Inner box:	B. 外箱 Outer carton:
L240±2 * W170±2 * H110±2	L390±5 * W240±5 * H250±5
	

11. 其他 / Others

12.1 如果在使用中有超出本规格书的要求, 须经双方协商确认。

In the event that an impropriety is found beyond this specification, it shall be fixed by mutual agreement between the parties.

12.2 如果本规格书有不适当的情况, 须通过双方协商并由本公司修改。

In the event that an impropriety is found in this specification, Shenzhen Atripod Technology CO., LTD shall amend it by mutual agreement between the parties.